

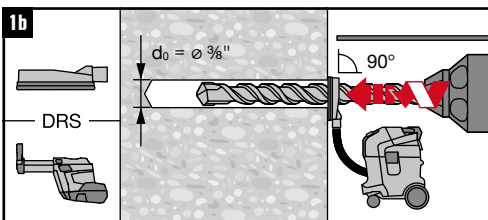
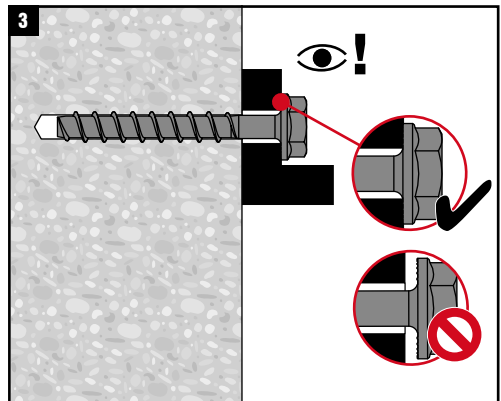


		$h_{nom} < 2 1/8''$	$h_{nom} \geq 2 1/8''$	$h_{nom} < 2 1/8''$	$h_{nom} \geq 2 1/8''$
	Nuron SID 6-22				
	Nuron SIW 4-22				
	CPC SID 4 22/18-A				
	CPC SIW 22/18-A				
		40 ft-lb	40 ft-lb	40 ft-lb	40 ft-lb

KH 3/8"	h_1^*	h_{nom1} = 1.625"	h_{nom2} = 2.5"	h_{nom3} = 3.25"
		t_{fix1} max	t_{fix2} max	t_{fix3} max
3/8" x 2 1/8"	2 3/8" - t_{fix}	1/2"	-	-
3/8" x 3"	3 1/4" - t_{fix}	1 3/8"	1/2"	-
3/8" x 3 1/2"	3 3/4" - t_{fix}	1 7/8"	1"	1/4"
3/8" x 4"	4 1/4" - t_{fix}	2 3/8"	1 1/2"	3/4"
3/8" x 5"	5 1/4" - t_{fix}	3 3/8"	2 1/2"	1 3/4"

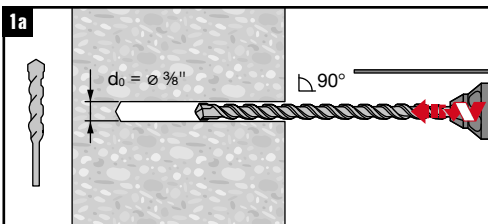

*For non-hole cleaning installation (steps 1.a or 1.b), make sure to drill deep enough to achieve h_1 , taking into account the depth of debris remaining in the hole

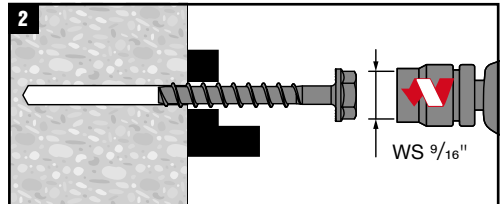